



500 Cobalt



ABSOLUTE Specifications

Manufacturing process Tufting 1/110' Loop pile
 Pile Content 100% PP StainSafe
 Primary backing Woven PP
 Secondary backing Textfor feltbacking
 Pile weight ca. 450 gsm/m² (16 Oz)
 Total weight ca. 1.300 gsm/m²
 Pile height ca. 3.5 mm
 Total height ca. 7 mm
 Number of knots ca. 158.000 /m²
 Width 400 cm

Suitability

For Public Areas, Corridors, Guest Room, Restaurant, Casino, VIP Lounge, Staircase, etc.

Warranties

10-Year Limited Residential Carpet and Semi Commercial Wear Warranty
 Lifetime Antishock Carpet Warranty

Ideal for Contract Use

Intentional gapping has been left in the pile for smooth pile flattening
 The surface should be dry, smooth, flat, dust free and resistant to compression and load-bearing
 Where seaming is necessary, a seam sealer must be used for all such installations.
 Due to dyest variations, actual material may vary slightly from the samples.
 Chair pads are recommended to prevent premature wear of carpet.

Performance

Light fastness 5-6
 Water resistance 4-5
 Thermal resistance 0,11 m² K/W
 Sound insulation 20 dB
 Fireclass EN 13501-1
 Bleach resistant
 Characteristics Pile outside

HERITAGE™
PLUS


ABSOLUTE



835 Wheat

ABSOLUTE

HERITAGE™
PLUS
Bringing Floors to Life...




Manufactured in Europe
by Balta



ABSOLUTE

Antistatic * Anti-Bacterial * Flame Retardant * Stain Safe * Solution Dyed

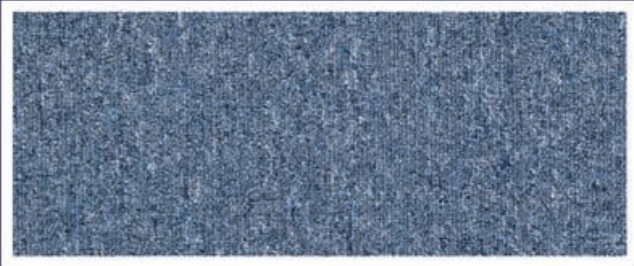

500 Cobalt



140 Maize



316 Crimson



609 Amazone




235 Almond



822 Nutmeg



881 Coral

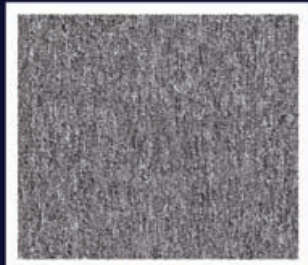

914 Slate



835 Wheat



858 Barley