

## **Specifications**

Construction Fibre Pile Weight **Total Weight** Pile height Stitch Rate Secondary Backing Standard Roll Size

1/10" Tufted Loop Pile Graphics 100% BCF Solution 2400 Denier ca. 880g/m² (26 oz/y²) ca. 1900g/m<sup>2</sup> (56 oz/y<sup>2</sup>) ca. 2mm low, ca. 6mm high 44.5 per 10cm (11.1 SPI) ActionBac<sup>®</sup> 3.66 x 30m

## Warranties

10-year Limited Carpet Wear Warranty

Ideal for Medium Contract Use.

to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations Due to dyelot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

## Performance (as tested by ITTS Inc. USA)

Stain Resistance Static Control Tuft Bind Flammability

10 (AATCC-175) Built-in Permanant 5.8 lbs (ASTM-D-1335) Max 0.25% change (AACHEN)

US Federal Flammability Std Pill Test Smoke Density

0.17 W/cm<sup>2</sup> (ASTM-E-648) Passes (CPSC FF1-70) Self-extinguishing (ASTM-D-2859) Max 450 (ASTM-E-662)

Colourfastness to light

Radiant Panel


to wet & dry cleaning to ozone

5 (AATCC-16E) 5 (AATCC-165) 5 (AATCC-129)



HERITAGE™ Elegance & Comfort in Modern Living



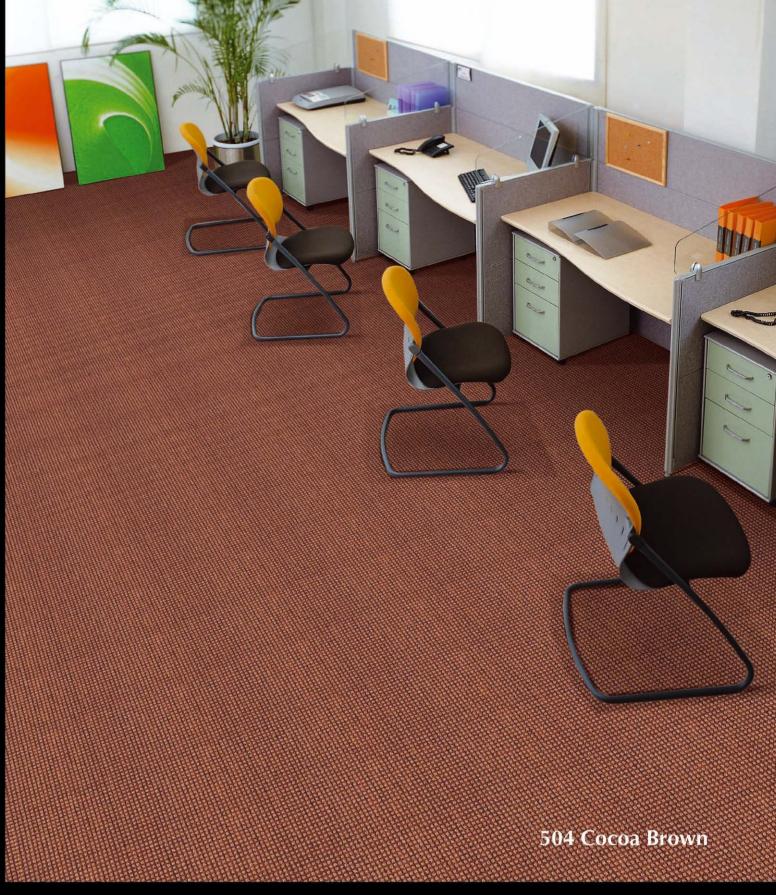





















504 Cocoa Brown 510 Blueprint 511 Dawn Grey