



Elegance & Comfort in Modern Living



Melody 1

CARPET TILES



MELODY 1 Specifications

Construction	Level Loop Pile, 1/10" Gauge
Fibre	100% BCF Solution Dyed Synthetic
Pile Weight	ca. 750g/m ² (22 oz/y ²)
Total Weight	ca. 3210g/m ² (95 oz/y ²)
Pile Height	ca. 3.5mm
Stitch Rate	48 per 10cm
Backing	ECO Back - "PVC Free"
Size per Tile	50cm x 50cm
Tiles per Box	20 pcs (5m ²)

Warranties

10-year Carpet Wear Warranty
Lifetime Antishock Carpet Warranty

Ideal for Medium Contract Use.

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Generation	Permanently antistatic
Tuft Bind	8.8 lbs (ASTM-D-1335)
Dimensional Stability	< 0.1% change (AACHEN)
Flammability	
Radiant Panel	>= 0.45 watts/cm ² (ASTM-E-648-06)
Pill Test	8 (ASTM-D-2859-06)
Smoke Density	Max 450 (ASTM-E-662-06)
Colourfastness	
to light	5 (AATCC-16E)
to wet & dry crocking	5 (AATCC-165)
to ozone	5 (AATCC-129)

Environment

The design and production of Melody 1 Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

Melody 1 Tile is an environmentally friendly "green" carpet.

Installation Method



Quarter-Turn



Colors



1361 MALIBU SAND



1362 GLACIER GREY




1364 RICH EARTH



1366 NOVEMBER SKY



1365 CONTINENTAL BLUE

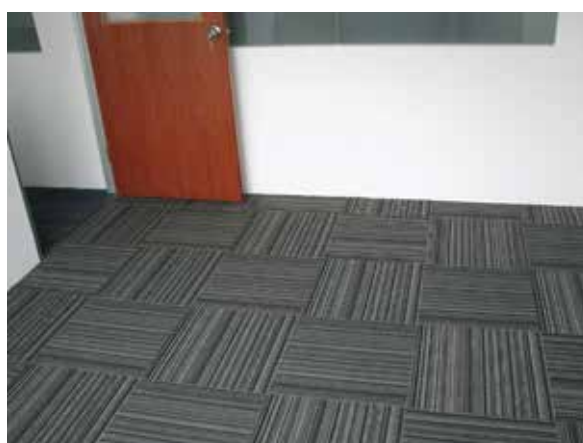

MELODY 1 - 1366 NOVEMBER SKY AND 1365 CONTINENTAL BLUE
(Office at the Central Singapore)

Melody 1
CARPET TILES