

Specifications

Construction Yarn Composition Dye Method Machine Gauge Pile Weight Total Weight Pile Height Total Thickness Backing Size per Tile

Tiles per Box

Warranties

10-year Carpet Wear Warranty Lifetime Antishock Carpet Warranty

Ideal for Heavy Commercial Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load bearing. The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles.

1/12" Multi-Level Loop Pattern Invista® Nylon 6

Fibre Glass Layer (PVC-Free Tile)

ca. 815g/m² (24 oz/y²) ca. 3500g/m² (103 oz/y²) ca. 4mm (+/-0.5mm)

ca. 7mm (+/-0.5mm)

Eco Backing with

25x100cm

20pcs per Box

Yarn Dyed

1/12″ ໌

carpet tiles. Due to dyelot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.



Performance (as tested by ITTS Inc. USA)

5 (AATCC-175-2003)

Class 1 (ASTM-E-648)

5 (AATCC-16E) 5 (AATCC-165) 3 (AATCC-129)

Permanently antistatic 10.9 lbs (ASTM-D-1335)

Max 2% change (AACHEN)

Self-extinguishing (ASTM-D-2859) Max 450 (ASTM-E-662)

Stain Resistance Static Generation Tuft Bind Dimensional Stability Flammability Radiant Panel Pill Test Smoke Density

Colourfastness to light to wet & dry cleaning to Ozone

Environment

The design and production of Topaz 4 Tile conforms to ISO 14001:2004 Environmental Management System and complies with environmental regulations. Topaz 4 Tile is an environmentally friendly "green" carpet.








opaz 4

Loop Tile

4409

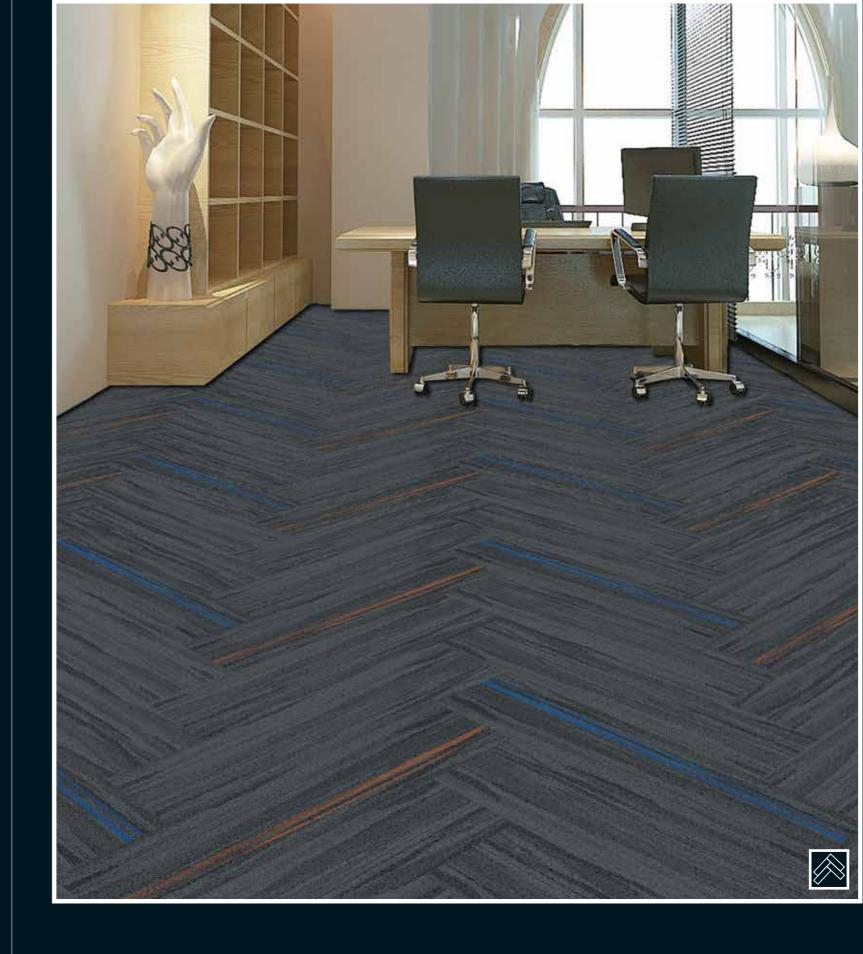















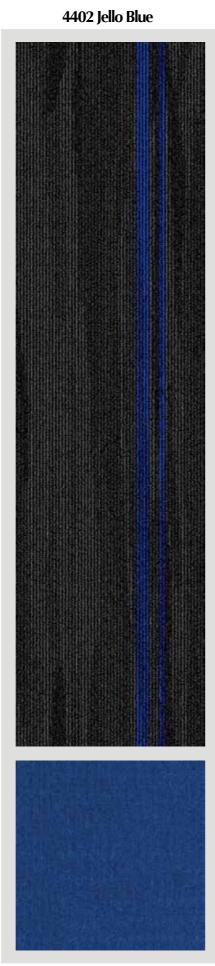


In plank size 25cm x 100cm





4405 Apple Green

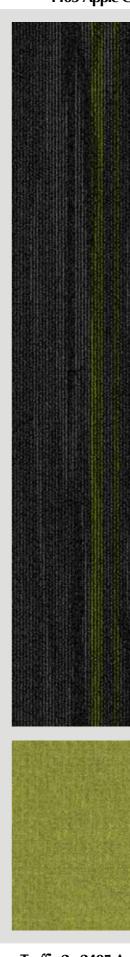

Traffic 2 - 2510 Dark Grey

Traffic 2 - 2401 Freezer Red

Traffic 2 - 2405 Apple Green

Invista[®] Nylon 6 • Stain-resistant • Anti-static • Flame-retardant



4406 Royal Gold

4409 Orange Sun



Traffic 2 - 2406 Royal Gold

Traffic 2 - 2409 Orange Sun