

Mandate 10

CARPET TILES



Herringbone

1043 OXFORD BLUE


Please note: There may be slight color difference between the picture and actual carpet. Slight color variation may occur from dye lot to dye lot.



1041 CORNICO BEIGE



Brick

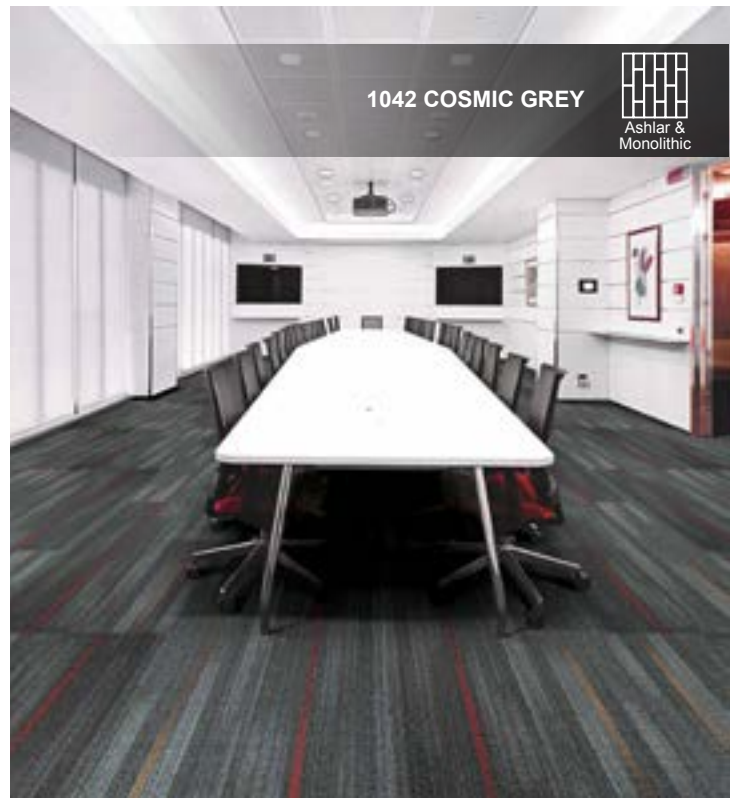

1042 COSMIC GREY




Ashlar & Monolithic



1041 CORNICO BEIGE




1042 COSMIC GREY

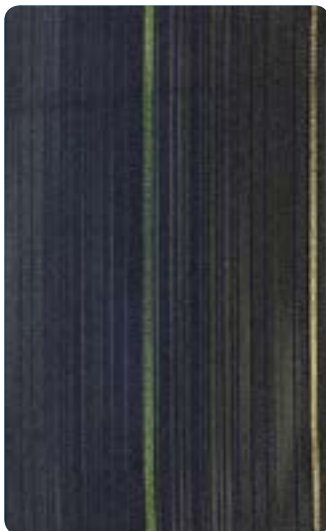


1043 OXFORD BLUE


Installation Method



Ashlar & Monolithic



Ashlar



Brick



Herringbone



SGBC



TUV SUD PSB



Excellent

LIC NO.: G00034

Kindly check stock availability with us before confirming the order.

MANDATE 10 Specifications

Construction	1/12" Multi-Level Loop Graphic
Yarn Composition	100% Solution Dyed Olefin
Pile Weight	ca. 610 g/m ² (18 oz/yd ²) (+/- 10%)
Total Weight	ca. 3800 g/m ² (112 oz/yd ²)
Pile Height	ca. 3 mm / 4 mm / 5 mm
Total Height	ca. 7 mm
Stitch Rate	39 per 10 cm
Primary Backing	Non-woven
Backing	ECO Back - "PVC Free"
Plank size	50 cm x 100 cm

Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Control	Pass - Max. 4 kV (AATCC-134-1996)
Tuft Bind	Pass - 8 lbs (ASTM-D-1335)
Dimensional Stability	Pass - Max. 0.1% change (AACHEN)
Indoor Air Quality (V.O.C.)	Pass - No VOC Detected (ASTM-D5116-10)
Impact Noise Rating	ΔL: 26 dB (ISO 10140)
Sound Absorption	αw 0.20 (ISO 354)
	Hz 125 250 500 1000 2000 4000
	αs 0.01 0.03 0.08 0.28 0.35 0.43

Flammability	
Radiant Panel	Pass - Class II (ASTM-E-648-06)
Pill Test	Pass - 8 (ASTM-D-2859-06)
Smoke Density	Pass - Max. 450 (ASTM-E-662-06)
Colourfastness	
to light	Excellent - 5 (AATCC-16E)
to wet & dry crocking	Excellent - 5 (AATCC-165)
to ozone	Excellent - 5 (AATCC-129)

Warranties

10 Year Carpet Wear Warranty
Lifetime Anti-shock Carpet Warranty

Ideal for Medium Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dye lot variations, actual color may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

Environment

The design and production of Mandate 10 Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

As a responsible manufacturer and to minimize our carbon footprint, a majority of our excess production materials are recycled in-house resulting in a minimum of 10% recycled content in our tile backing. Mandate 10 Tile does not contain any PVC in its manufactured materials and packaging.

Mandate 10 Tile is an environmentally friendly "green" carpet.