

# MANDATE 8

CARPET TILES

**HERITAGE™**  
CARPETS

Elegance & Comfort in Modern Living

8405 MONDE BROWN  
8403 NOVO BLUE



Quarter Turn



8404 RIPPLE BLACK



Quarter-Turn



8405 MONDE BROWN  
8407 Raki Beige

Quarter-Turn







8407 RAKI BEIGE

Monolithic





- 100% Solution Dyed Olefin •
- Anti-Static •
- ECO Cushing Backing •
- Flame-Retardant •

Size 50cm x 50cm






Monolithic

8401 AZURE GREY  
8403 NOVO BLUE


# MANDATE 8

SWATCHES

8401 AZURE GREY

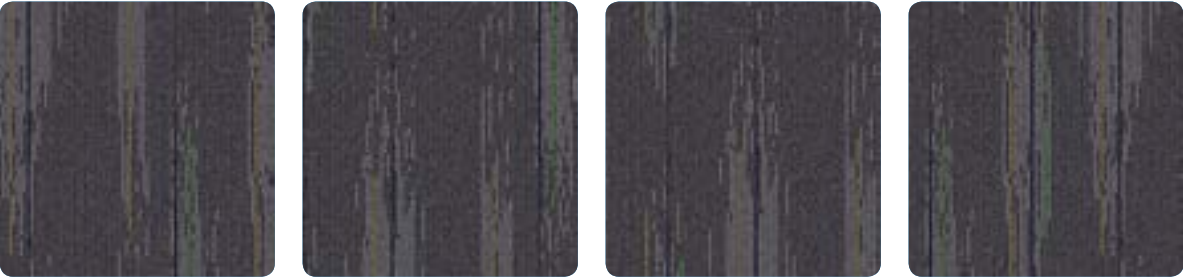

8403 NOVO BLUE

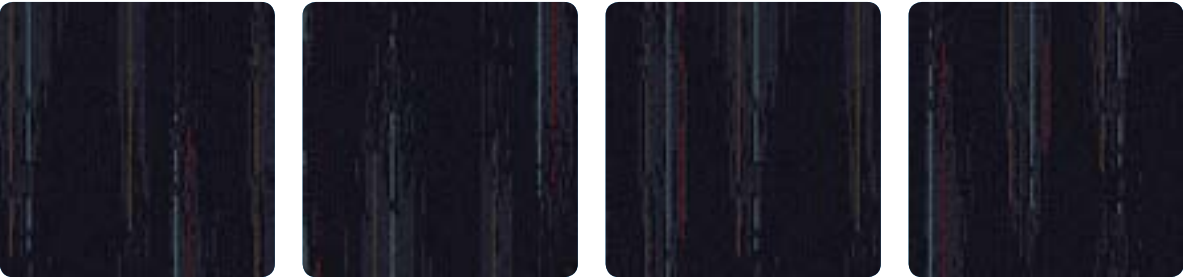

8404 RIPPLE BLACK



8405 MONDE BROWN



8407 RAKI BEIGE



## MANDATE 8 Specifications

Construction	1/12" Multi-Level Loop Graphic
Yarn Composition	100% Solution Dyed Olefin
Pile Weight	ca. 610 g/m <sup>2</sup> (18 oz/yd <sup>2</sup> ) (+/- 10%)
Total Weight	Ca. 3400 g/m <sup>2</sup> (100 oz/yd <sup>2</sup> )
Pile Height	Ca. 4 mm (+/- 0.5 mm)
Total Height	Ca. 6 mm (+/- 0.5 mm)
Density	5486
Backing	ECO Back - "PVC Free"
Tile Size	50 cm x 50 cm
Packing	20 pcs per box (5 m <sup>2</sup> )

## Performance (as tested by ITTS Inc. USA)

Stain Resistance	9 (AATCC-175-2003)
Static Control	Pass - Max. 4 kV (AATCC-134-1996)
Tuft Bind	Pass - 8 lbs (ASTM-D-1335)
Dimensional Stability	Pass - Max. 0.1% change (AACHEN)
Indoor Air Quality (V.O.C.)	Pass - No VOC Detected (ASTM-D5116-10)
Impact Noise Rating	ΔL: 26 dB (ISO 10140)
Sound Absorption	αw 0.20 (ISO 354) Hz 125 250 500 1000 2000 4000 αs 0.01 0.03 0.08 0.28 0.35 0.43
Flammability	
Radiant Panel	Pass - Class II (ASTM-E-648-06)
Pill Test	Pass - 8 (ASTM-D-2859-06)
Smoke Density	Pass - Max. 450 (ASTM-E-662-06)
Colourfastness	
to light	Excellent - 5 (AATCC-16E)
to wet & dry crocking	Excellent - 5 (AATCC-165)
to ozone	Excellent - 5 (AATCC-129)

## Warranties

10 Year Carpet Wear Warranty  
Lifetime Anti-shock Carpet Warranty

Ideal for Medium Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dye lot variations, actual color may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

## Environment

The design and production of Mandate 8 Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

As a responsible manufacturer and to minimize our carbon footprint, a majority of our excess production materials are recycled in-house resulting in a minimum of 10% recycled content in our tile backing. Mandate 8 Tile does not contain any PVC in its manufactured materials and packaging.

Mandate 8 Tile is an environmentally friendly "green" carpet.

## Installation Method



Monolithic



Quarter-Turn



# MANDATE 8

CARPET TILE